

22" Quad Wide Screen LCD Monitor




- Built-in integrated Quad processor
- 3D Comb-filter & 3D De-interlace
- HDMI & VGA Input
- BNC Connectors of Video Input/Output
- 4 Alarm Inputs
- Industrial Heavy Duty Case
- OSD control & adjustments
- High resolution and wide angle view
- Built-in speaker with clear audio sound



ADM-22MQ

Rear Panel of ADM-22MQ

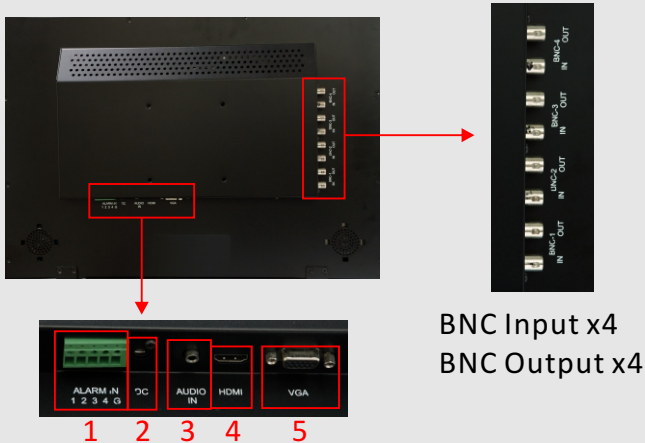

BNC Input x4
BNC Output x4

1. Alarm Input x 4
2. Power: DC12V
3. Audio Input
4. HDMI Input
5. VGA Input



The integrated swivel stand of the base can tilt up or down to optimize the viewing angle. The stand also allow table top use.

Model	ADM-22MQ
Resolution (max.)	1680x1050
Displayable colors	16.7M
Brightness	500 cd/m ²
Contrast Ratio	1000:1
Response Time	5ms
Aspect Ratio	16:10
View Angle	H: 170° / V: 170°
Input/Output	BNC x 4, VGA x 1, HDMI x 1, Audio x 1 / BNC x 4
Functions	PIP, POP, Alarm pop-up
Input Voltage	DC12V
Power Consumption	5A (max.)
Operation Temp.	0°C to +40°C (32°F to +104°F)
Humidity	Max 82%
Dimension	525(W) x 400 (L) x 196 (D) mm
Weight	8.2kg
On Screen Display	
Control buttons	Source, UP, Down, +/-, Menu, Power
Color adjustment	Contrast, Brightness, Color, Sharpness, Color temp., Backlight, NR, Zoom mode
Sound adjustment	Treble, Bass, Balance, Sound mode, Surround mode
Screen adjustment	H-Position, V-Position, Auto Adjust, Phase, Clock
OSD function	Source, Language, OSD Timer, OSD Blend, Reset, Firmware, Res.