



## Infrared OSD Bullet Camera

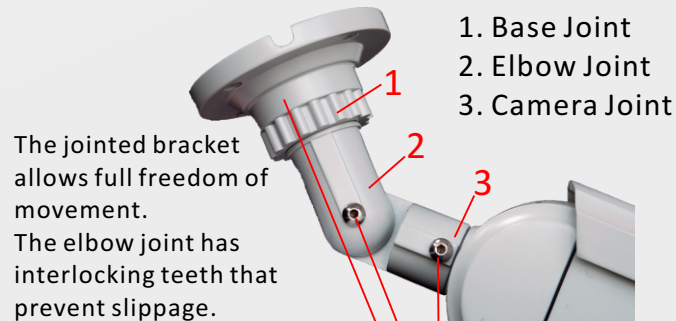

Security screws lock down all adjustment points - at camera, at base, and at elbow pivot.

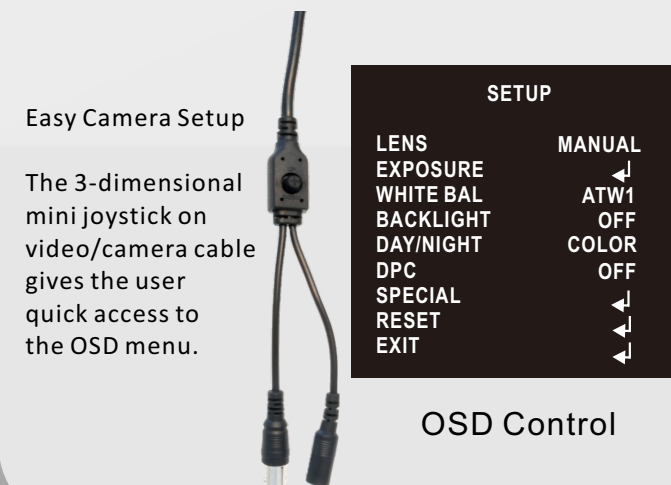

Model	AIR-492V
Image Sensor	1/3" Sharp Color CCD
Resolution	480 TV Lines
Effective Pixels	NTSC: 510x492 / PAL: 500x582 (H)x(V)
Min. Illumination	0.1 Lux @ F1.8
Lens	4-9mm Vari-focal Lens
S/N Ratio	More than 52dB(AGC OFF)
Electronic Shutter	1/60(1/50)~1/100,000sec
Video Output	1.0Vp-p/75 ohm Composite
Sync. System	Internal
OSD	Built-in OSD Menu
White Balance	ATW/AWC(PUSH LOCK)/Manual
Shutter/AGC	Auto/Manual/FLK
Backlight	BLC/HLC
IR LED	42pcs
IR Distance	30-35M (100'-115')
Weatherproof	IP 65
Power Source	DC12V +/- 10% @500mA w/IR on
Dimensions	118 (W)x 84(H)x 225 (L) mm
Weight	1050g
Operating Temp.	-10°C to +50°C (-14°F to +122°F)