


Professional H.264 DVR with HDMI Output

- H.264 Video Compression Format
- Full HD 1080P (1920x1080) Output
- Real Time Recording (480/400fps @ CIF)
- Network: IE/CMS/3G Mobile Phone Remote
- Dual Stream Function
- Easy DVR Setup/ Friendly GUI/ Easy Backup
- Support Pre-Alarm / Watermark / Bookmark search
- Support Daylight Saving Time / NTP
- HDD S.M.A.R.T function



Specification

Model		PR-2716	
Video Input (NTSC/PAL)		BNC x 16 (16CH Loop Out: Option)	
Video Compression Format		H.264 / (Network Transmission: H.264)	
Video Output		3x Main (HDMI, VGA & Composite) / 1x Spot (Composite)	
VGA Output		800 x 600; 1024 x 768; 1280 x 1024; 1920x1080 pixels	
Audio Input/Output		1 CH / 1 CH	
Sensor In/Alarm Out		4 CH / 1 CH	
Display	Speed	480/400fps	
	Resolution(pixels)	720 x 480 (NTSC) / 720 x 576 (PAL)	
	Split Screen	1 / 4 / 9 / 16 / PIP	
Recording	Resolution(pixels)	NTSC:352 x240 / 720x240 / 720x480, PAL:352 x288 / 720x288 / 720x576	
	Mode	Normal, Motion, Alarm, Scheduled, Emergency recording	
	Speed	NTSC	480fps CIF(352 x 240) 240fps 2CIF(720 x 240) 120fps D1(720x480)
		PAL	400fps CIF(352 x 288) 200fps 2CIF(720 x 288) 100fps D1(720x576)
Playback	Display	1 / 4 / 9 / 16 (Real-Time Playback @CIF)	
	Search	Date, Time, Event (Motion, Alarm), System Search *Time bar playback via mouse	
	Speed	Normal, REW & FF (1x,2x,4x, 8x,16x, 32x), Frame to Frame, Pause	
	Device	Licensed software application/ IE/ Front panel/ Remote controller/ Mouse	
Hard Disk Drive Storage		3 SATA HDD up to 9TB or 2 SATA HDD + 1 DVD burner / e-SATA external Storage Supported	
Backup Device		USB2.0, DVD Writer (optional), Remote Network Backup	
Web Interface		Remote software / IE Browser / 3G Mobile Phone Surveillance Function	
PTZ Control / Port		Support Pelco-D, Pelco-P protocol / RS-485 / RS-232	
Remote Alarm Notification		Email notification and upload to FTP site	
Network Connection		PPPoE, TCP/IP, DHCP, SMTP, DDNS	
LAN		Gigabit Ethernet (RJ45)	
Accessories		IR remote controller / Mouse	
Power		DC12V x 5A	

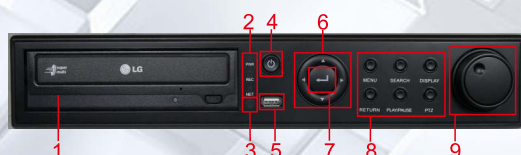

1. DVD Writer (Optional)
2. Indicator (Power, Record, Network)
3. IR Sensor for Remote Controller
4. Power On/Off
5. USB Connector
6. Control Button (Up/Down/Right/Left)
7. Confirm Button (Enter Key)
8. Function Button
9. Shuttle (Fast Forward/Fast Backward)